

# Top-entry wall frame


## Product overview

The Calefa V wall frame provides everything required to convert standard bottom-entry Calefa V units to suit top-entry installations.

The supplied materials include: metal frame with pre-drilled mounting points; pre-insulated brass pipes; isolation valves to heating and hot water flow and return; isolation and bypass valve to DHW flow and return.

The frame is designed to run behind the Calefa V unit and adds just 70mm to the total installation depth.

Includes a C-C 80 mm Flushing bypass valve with R 3/4" ISO 7/1 thread connection.

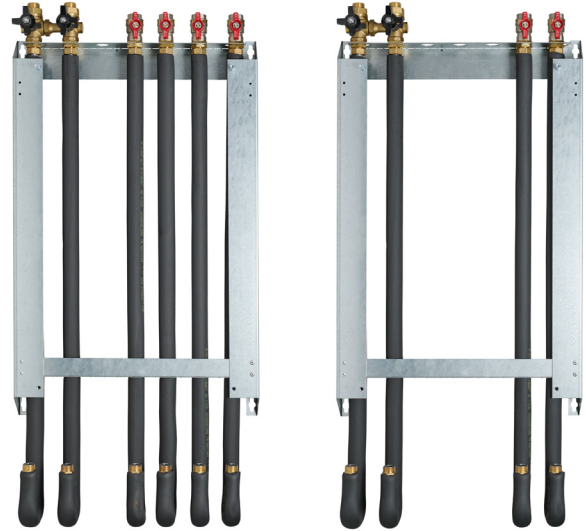


3091445  
6-pipe

3096991  
4-pipe

Product code	Description
3091445	Frame Calefa V UK 6 Pipes UP
3096991	Frame Calefa V UK 4 Pipes UP

## Unit dimensions

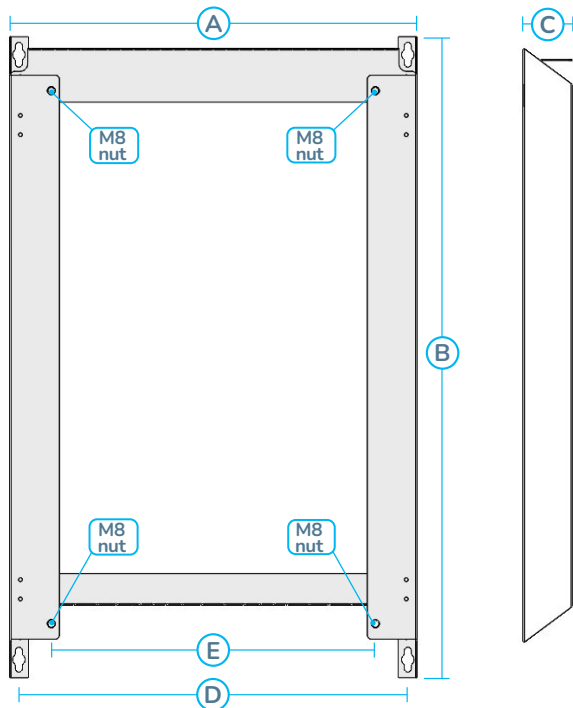

Key	Description	mm
A	Total frame width	530
B	Total frame height	830
C	Total frame depth	70
D	Wall mount points, centre-to-centre	504
E	HIU mount points (M8 thread nut), centre-to-centre	420