

Wavin Floating Floor


High Compressive Strength Underfloor Heating Floorboard

Product Information

Wavin Floating Floor boards are made from high compressive strength extruded polystyrene able to withstand the rigours of the installation process as well as the long term loads imposed in residential and commercial applications. The boards are manufactured to suit the pipe diameter and spacing required to achieve the desired thermal output.

Product Benefits

- High resistance to compression – 250 & 300kPa
- Works in conjunction with acoustic treatments

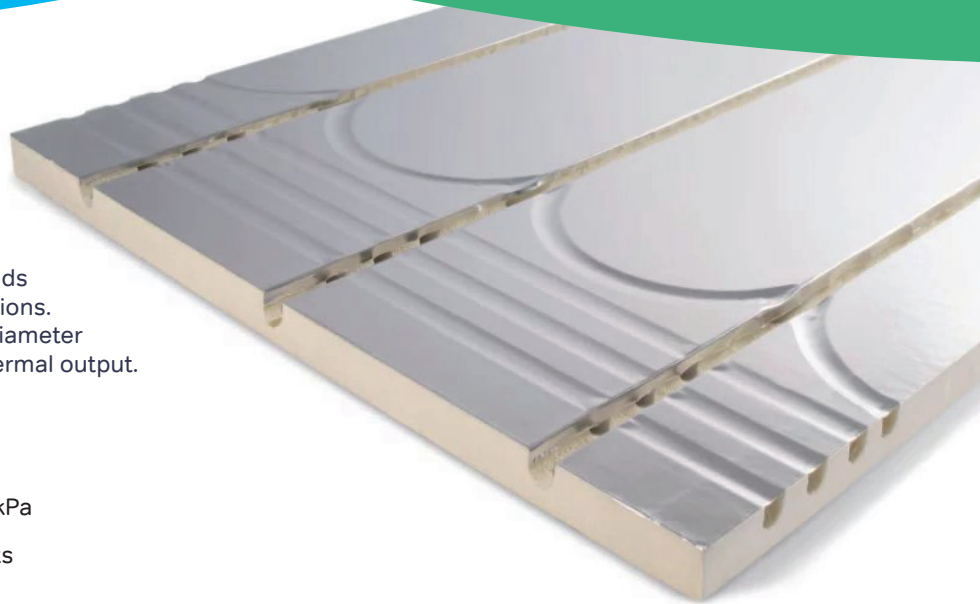

Technical Data		Floating Floor	
Product description	–	High compressive strength UFH board	
Strength at 10% compression	kPa	250	300
Thermal conductivity	W/mK	0.033	0.033
Temperature range	°C	-50/+75	-50/+75
Route sizes available (to suit pipe diameter)	mm	16	16
Pipe centres	mm	200	200
Board size	mm	600 x 1250	600 x 1250
Thickness	mm	25, 30	40, 50

Third Party Accreditation and Approvals



Environmental Credentials

