


Indoor installation model (On the floor)

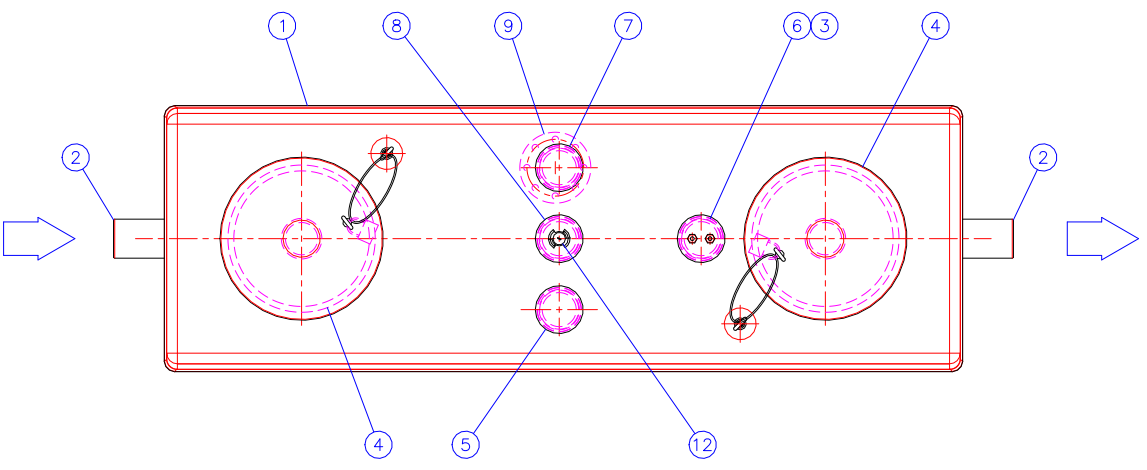

1	EuroREK NS4 SL GRP grease separator (EN1825), Indoor installation model	1	
	Nominal size 4 l/s		
	GRP body (750x1180, L=2250 mm)		
	pH 3-10/Heat endurance continued 60°C (temporary max. 80°C)		
	V Total volume	1470 l	
	Vg Grease storage capacity	160 l (H=100 mm)	
	Vs Sludge storage capacity	400 l	
2	Inlet / Outlet sewer	D110	1/1
3	Grease alarm		1
4	Maintenance hole with odourproof cover	ø454/382 mm	2
5	Ventilation outlet	D110	1
6	Inlet for probes	D110	1
7	Inlet for Emptying pipe	D110	1
8	Inlet for Washing nozzle	D110	1

ACCESSORIES:		
9	Emptying pipe with flange, PVC, DN80	(x) <input type="checkbox"/>
10	Imubox quick coupling box for 1 pc. DN80 Suction pipes	(x) <input type="checkbox"/>
11	Data Transfer Unit	(x) <input type="checkbox"/>
12	Washing nozzle	(x) <input type="checkbox"/>

Title: <b>EuroREK NS4 SL GRP Grease separator (EN1825)</b>		Drawing type <b>CUSTOMER DRAWING</b>	
Design by: <b>HT/JS</b>	Approved by: <b>HT 18.04.2018</b>	Drawing no. <b>32BB11be</b>	Date: <b>18.04.2018</b>
Construction site:		Scale:	
		WAVIN-LABKO Ltd. VISIKKATU 1 FIN-33720 TAMPERE FINLAND tel. +358 20 1285200 fax. +358 20 1285280	

This drawing and the technical information included in the drawing are property of Wavin-Labko. All the national regulations concerning this product have to be checked before purchase of the product. Installation have to be done according to installation manual.