

wavin **OSMA**

B125 Covers and Frames

Wavin Osma B125 Covers and Frames



- **450x450mm & 600x600mm options**
- **Square edges all round -**
Fast & easy installation into block paving
- **Wide flat flange & frame -**
Fast & secure fixing into bedding
- **75mm frame depth -**
Improved tarmac adhesion to help prevent cracking. Ideal for installation into block paving
- **Optional locking points -**
Increased security for higher risk areas
- **Grease channel -**
Prevent odour release
- **Kitemarked -**
Independently tested and certified by the BSI
- **Ductile iron**

Where it should be used

B125 covers offer a maximum weight loading of 12.5 tonnes. For use in both private residential and public pedestrian areas, specifically:

Single domestic driveways

Modern cars are getting bigger and heavier with 2 tonnes the new normal. A15 rated covers, even those rated to 3.5 or 5 tonnes are no longer sufficient. B125 rated cover gives added peace of mind for both the homeowner and the contractor.

Public footpaths




B125 rated covers are minimum requirement for non-trafficked public spaces.

wavin

An Orbia business.

Wavin Osma B125 Covers and Frames

Typical Installation detail

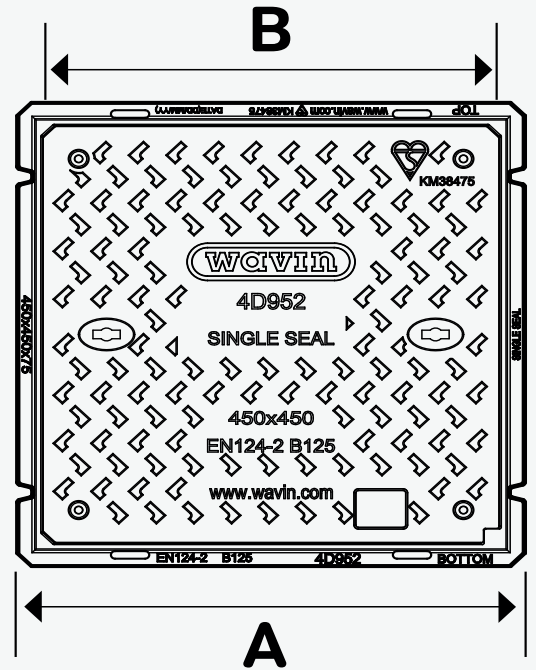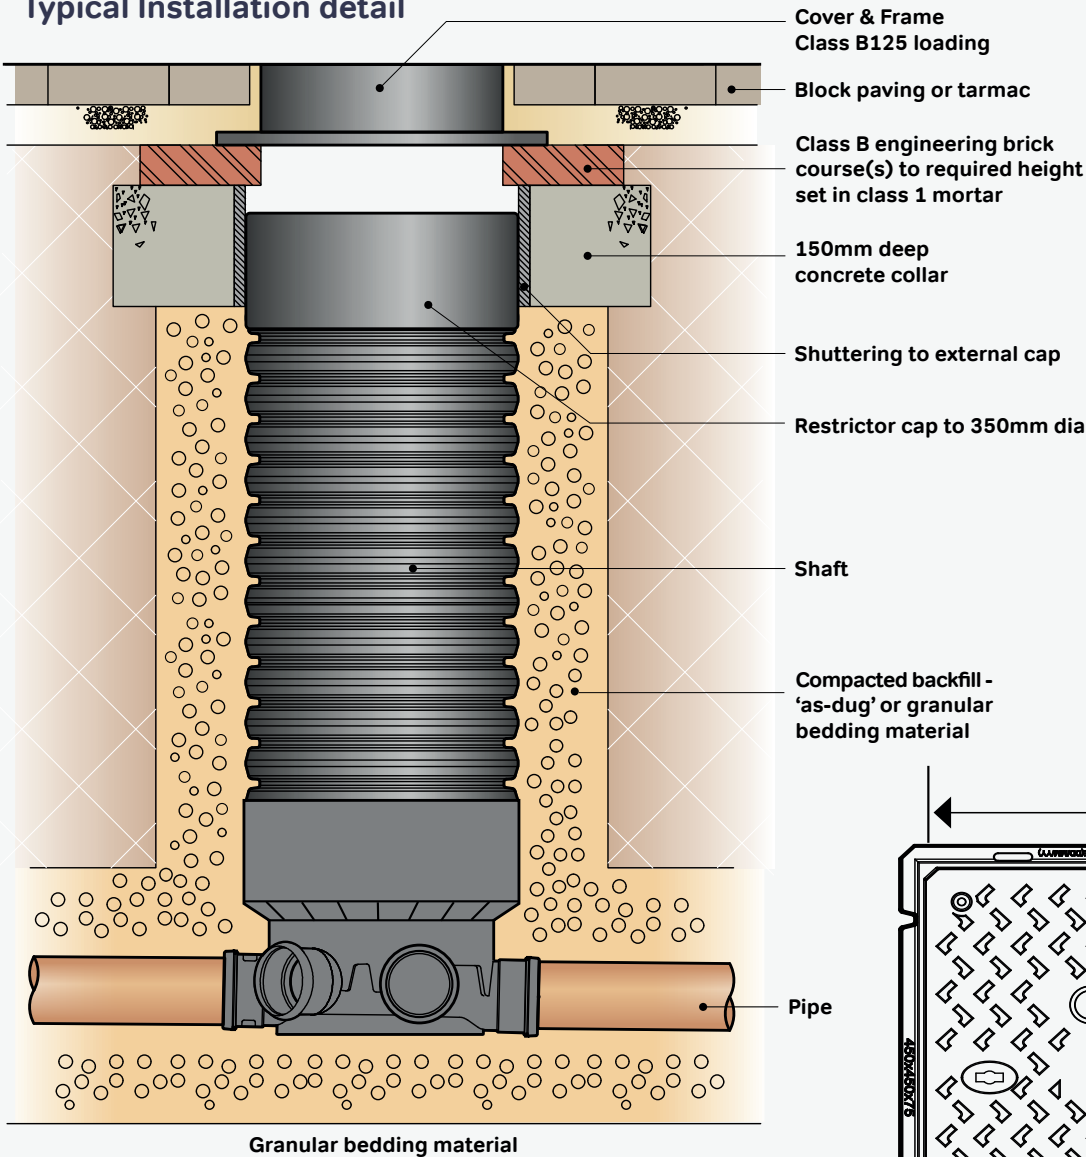

Description	Code	Screw locking	Colour	Weight (kg)	Clear opening mm	A (mm)	B (mm)	C (mm)
450x450x75mm B125	4D952		Black	27	450	540	500	75
450x450x75mm B125 Locked	4D952SCR	Yes	Black					
600x600x75mm B125	4D953		Black	43	600	688	648	75
600x600x75mm B125 Locked	4D953SCR	Yes	Black					